


# SOLIDA

A Group brand |  legrand



THE PERFECT  
COMBINATION OF  
QUALITY AND VALUE

**bticino**

# Fitting

in RESIDENTIAL  
and SMALL  
COMMERCIAL

Home, flat, small office, small shop



One dimension, **three modularity**



**1 MODULE**



**2 MODULES**



**3 MODULES**

**Neutral Style,  
suitable in every  
kind of interior.**

**FINISH IN  
GLOSSWHITE  
WITH SMOOTH  
SHAPE AND  
LIGHTABLE  
SWITCHES**





# EASY and SECURE installation

Easy to install  
and to wire

**SCREW TERMINALS ON PLATE:**

- Strength and guaranteed cable connection
- Easier pass-through wiring
- The terminals are protected thanks to the plastic case



## Installation from the front

Mechanism can not  
sink into the box



## Protection for children

German, French and Italian  
standard socket outlets,  
all with shutters (above all  
for children protection)




## Plate

The plate screw terminals  
ensure durable connections

# Installation

in flush mounting  
**BOXES**

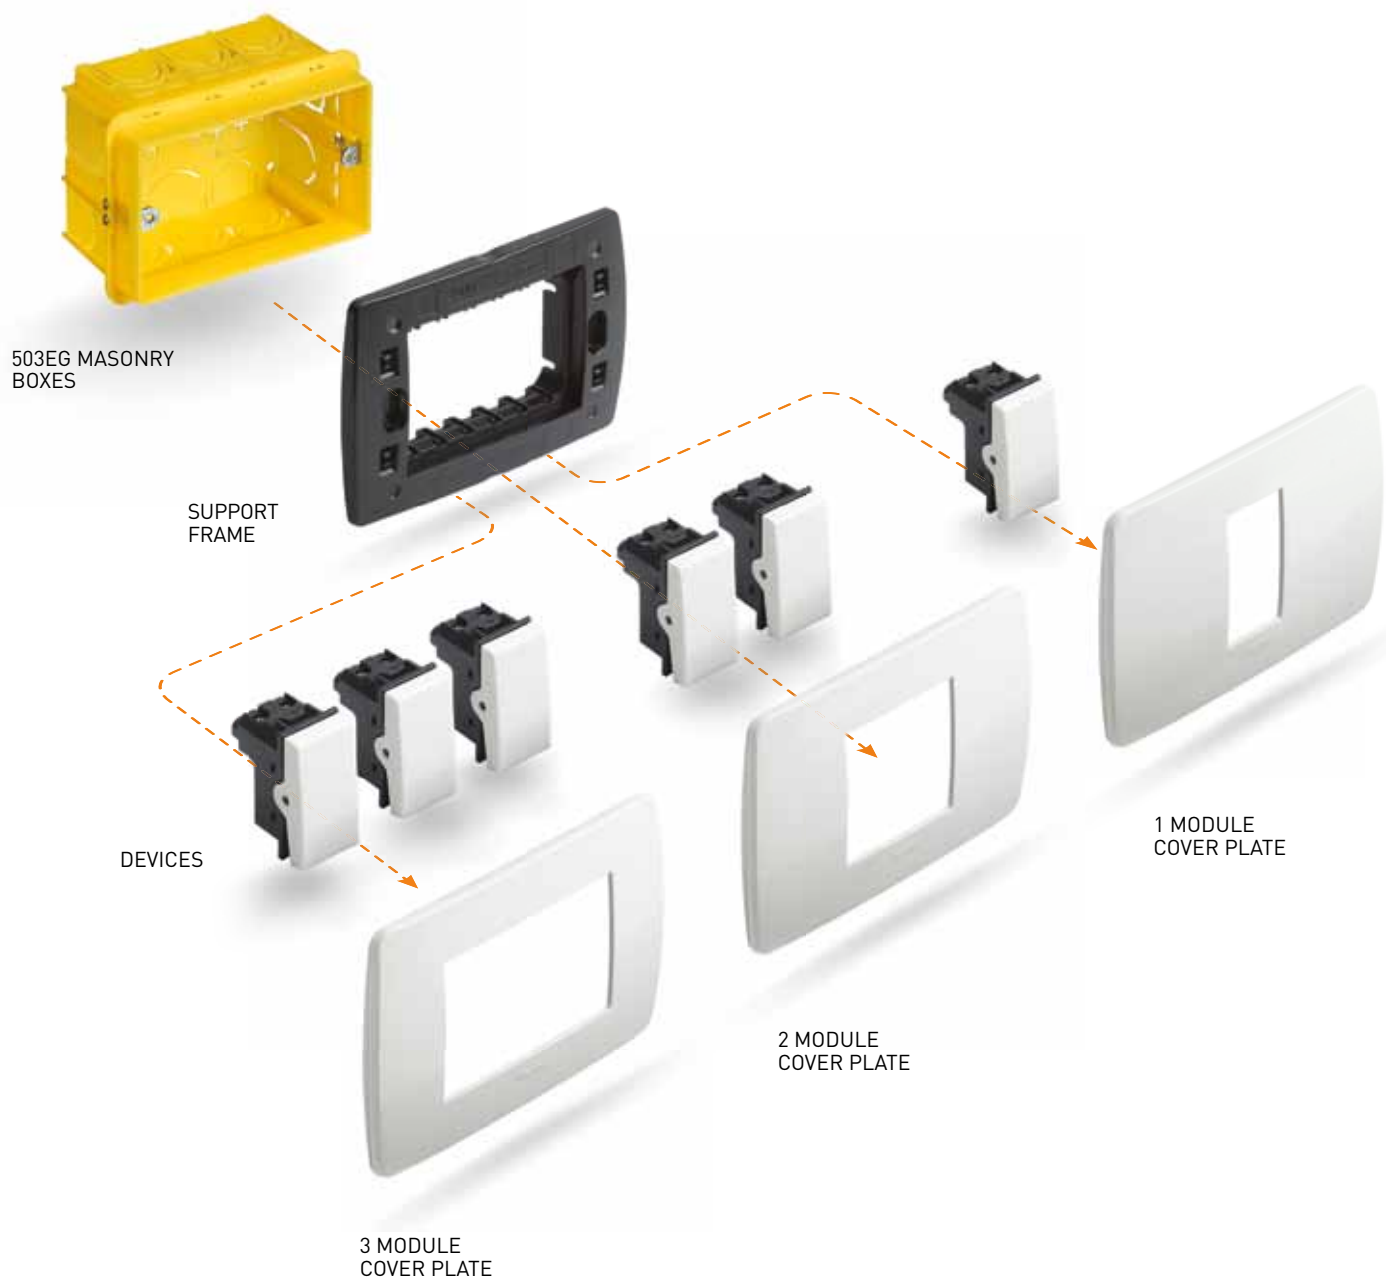

# SOLIDA

## CONTROL DEVICES AND LED



D4001L D4003L D4005L LN4742V230

## TV, RJ11, RJ45 SOCKET



D4202D D4269F D4232RJ11 D4262C5E D4950S

## SOCKET OUTLETS



D4125 D4140 D4180 D4142 D4122ET

## COVER PLATES AND SUPPORT FRAME



D4803M1BN D4803M2BN D4803M3BN D4703

Item	CONTROL DEVICES	
D4001L		One way switch 1P 16 AX 250 Va.c.
D4003L		Two way switch 1P 16 AX 250 Va.c.
D4005L		Pushbutton 1P (NO) 10 A 250 Va.c.
<b>LEDs</b>		
LN4742V230		LED for control devices 230 V - amber

Item	TV, RJ11, RJ45 SOCKET	
D4202D		Shunted coaxial jack - Ø 9.5 mm - male jack - screened TV + SAT sockets in die-casting housing with current flow
D4269F		Type F TV female connector - 75 Ω impedance - screw coupling - 1 module
D4232RJ11		RJ 11 telephone sockets
D4262C5E		RJ 45 data transmission/telephone sockets - 110IDC cat5E UTP

SOCKET OUTLETS		
D4125		Euro-american standard socket 2P 16 A 127/250 Va.c. - Ø 5 mm
D4140		German standard sockets 2P+E 16 A 127/250 Va.c. P31 type - with shutters for child protection
D4180		Italian standard socket 2P+E 16 A 250 Va.c. - centre distance 19 mm and 26 mm - for plugs 2P and 2P+E 10 and 16 A - with shutters for child protection
D4142		French standard socket 2P+E 16 A 250 Va.c. - with shutters for child protection
D4122ET		Egyptian standard socket 2P 10 A 250 Va.c. - contact tubes Ø 4 - 4.8 mm - centre line of holes 19 mm

BLANK PLATE		
D4950S		1 module blank plate

COVER PLATES AND SUPPORT FRAME		
D4803M1BN		1 module cover plate
D4803M2BN		2 module cover plate
D4803M3BN		3 module cover plate
D4703		Support frame - suitable for 1, 2, 3 module cover plate

**BTicino** SpA  
Via Messina, 38  
20154 Milano - Italy  
[www.bticino.com](http://www.bticino.com)

AD-EXSL13C/6B

BTicino S.p.A. reserved at any time the right to modify the contents of this booklet and communicate, in any form and modality, the changes brought to the same.